





SLOT UP-DOWN

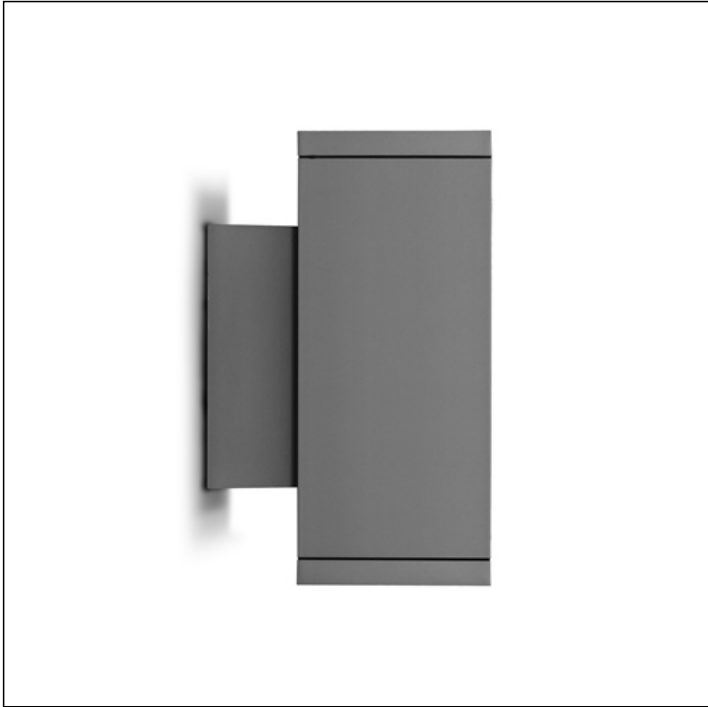

| h(m) | Ø(m) | 10° | | 33° | |
|------|------|-------|------|-------|--|
| | | E(lx) | Ø(m) | E(lx) | |
| 2 | 0.35 | 11644 | 1.18 | 1752 | |
| 4 | 0.70 | 2911 | 2.35 | 438 | |
| 6 | 1.05 | 1294 | 3.53 | 195 | |
| 8 | 1.40 | 728 | 4.71 | 109 | |
| 10 | 1.75 | 466 | 5.89 | 70 | |

Item no longer in the catalogue.

S.3846
2x HIT-CRI 70W 6600lm G12 230-240Vac ON-OFF
Wall mounted



Light Source Technical Data


| | |
|--------------------------------|----------------|
| Light source type: | 2x HIT-CRI 70W |
| Colour temperature: | 3000K |
| Rated module luminous flux: | 6600lm |
| Rated luminaire luminous flux: | 6468lm |
| Rated module power: | 140W |
| Rated luminaire power: | 168W |
| Luminaire efficacy: | 39lm/W |

Power Supply Technical Data

| | |
|-----------------|-----------------------|
| Voltage (AC): | 230-240Vac |
| Frequency (AC): | 50Hz |
| Dimmable: | NOT DIMMABLE (ON-OFF) |

Technical Installation Data

| | |
|------------------------------|----------------|
| Electrical insulation class: | I |
| Protection class IP: | IP65 |
| Mechanical resistance: | IK08 |
| Weight: | 11.8Kg |
| Power cable: | 0.4m - H07RN-F |

SLOT UP-DOWN**S.3846****SPECS SHEET****LUMINAIRE TYPE**

Wall mounted luminaire. IP rating IP 65

MATERIAL CHARACTERISTICS

Aluminium die cast housing in EN AB-47100 (low copper content) and extruded EN AW-6060 with high resistance against corrosion. Stone wash surface treatment prior to painting process. A4 grade Stainless Steel screws with 2,5-3% molybdenum content which increases the resistance against corrosion. Silicone gaskets. Painting Process : 3 Step Process

1) Surface treatment with BONDERITE. A heavy metal free chemical surface treatment containing ceramic nano particles giving a cohesive, inorganic and highly dense protective coating. 2) PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. 3) POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1200h. Mechanical resistance IK 08

LIGHTING PERFORMANCE

Reflector in 99.98% pure anodized aluminium (with TC and HIT lamp version). Clear toughened glass 8 mm thick. Lamp adjustable $\pm 15^\circ$ position. LOR 49%


WIRING

Fast connector IP67 ($\varnothing 6 \div 12$ mm) supplied as standard for single cable connection . Isolation: CLASS I . Available colours: Aluminium grey (cod.14). Weight: 11.8 Kg Glow Wire test: 650°C

Lamp not included.

ELECTRONIC EQUIPMENT SENSITIVE TO OVERVOLTAGE.

We recommend installing surge protection devices "SPD" in the electrical system. Protection devices prevent the intensity of these phenomena's, protecting the appliances from the risk of being damaged and extending the lifespan. Outdoor luminaires are subject to all types of permanent, temporary, or transient electrical disturbances. Such disturbances can create permanent damage or failure affecting its performance and durability. The surge protection device (supplied by SIMES) is utilized to limit the destructive effect of these phenomena. We suggest that each luminaire must be connected to one protection device at not more than 10m away. For correct coordination of the protections, a surge protection device must also be provided inside the electrical panel of the system (the selection of this device must be carried out from the electrical designer and is not supplied by SIMES).

SLOT UP-DOWN**S.3846****ACCESSORIES****S.2498****SURGE PROTECTION DEVICE 10kV CLASS I**

Compatible with all lighting fixtures classified under electrical Protection Class I Rated voltage 230-277V SPD type 2+3 Max Surge Protection 10kV IP67

EACH FIXTURE MUST BE CONNECTED TO ONE SINGLE SURGE PROTECTION DEVICE AT A DISTANCE OF NO MORE THAN 10m AWAY.